



COOLING ROOM

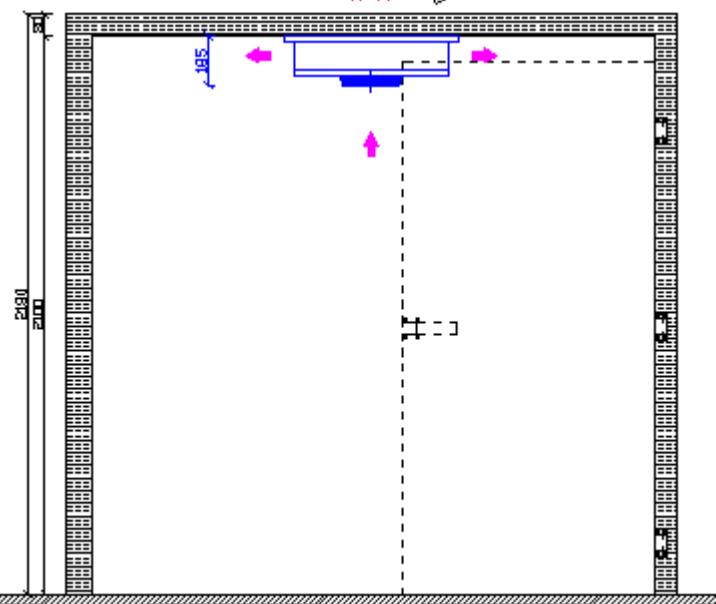

KCH 1

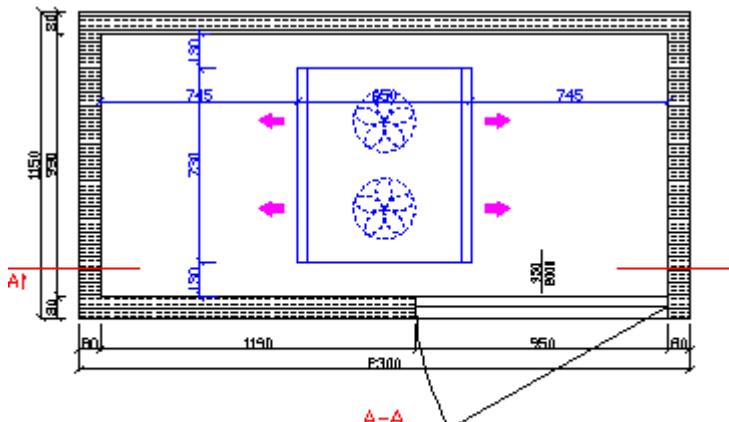

PHU STAN-MAR Marek Łukowski
www.stan-mar.com.pl
biuro@stan-mar.com.pl
tel: 0-61 879-82-52/ 0-61 879-88-26
fax: 0-61 870-50-01

TECHNICAL DATA

Dimensions [mm]	KCH 1	KCH 2	KCH 3
L.	External	2300	2300
D.	Extrenal	1150	2300
H.	External	2180	2180
Number of charge:	1200 [kg]	2500 [kg]	4000 [kg]
Temperature of charge:	+25 [°C]		
Final temp. of goods:	+2 [°C]		
Cooling time:	24 [h]		
Refrigerator:	R-404a		
Doors:	1 pc		
Goods rotation:	30 [%]		
Type of goods:	groceries		

VERSION:

-complete with refrigeration and control system (unit located on the roof of the chamber)

-housing isothermal chamber (double-coated sheet metal panels coated FeZn) is based on a system of modular panels with a core of rigid polyurethane foam with a density of approx. 42 kg / m, injected between the metal cladding. The thickness of the cartridge is 80 mm polyurethane-heat transfer coefficient of 0.27 W/m2K

-housing type locks Cam Lock, allowing for simple and quick installation, while ensuring the accuracy and tightness of the connections between the panels.

-housing has a hinged door fitted with a single-key lock with the ability to unlock from the inside. Standard size of door in the light of 950 x 2000 mm.

PURPOSE:

The purpose is to cool the cooling chamber to a product temperature of about 2 ° C (about 24 h) in the entire cross-section of a product inlet temperature of about 25 C.

Offered outside the standard features and additional elements:

PVC-profiles to the inner edges and corners to prevent dirt accumulation and facilitate cleaning the interior of the chamber,

-curtain strips of foil to freeze proof door openings to reduce the loss of coolness when you open the door,

-wall and ceiling panels may have a lining of coated sheet steel or sheet steel.

-possibility to floor