



TYP: FREEZING ROOM KR

TECHNICAL DATA

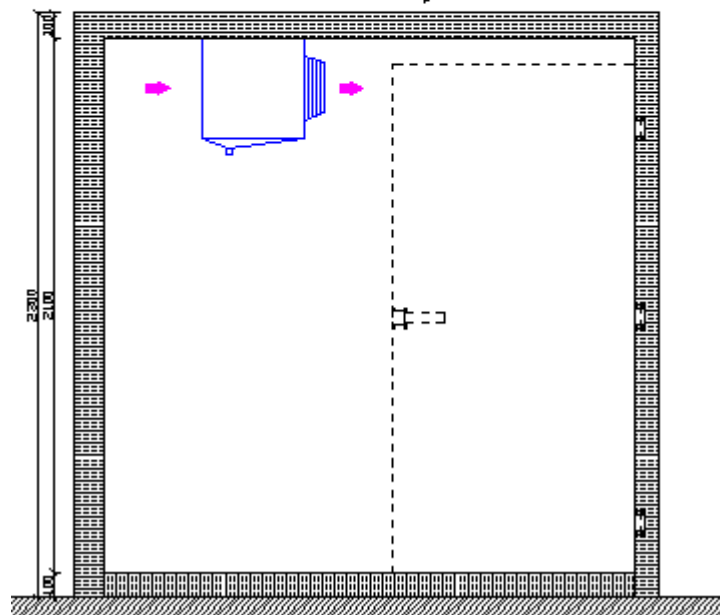

KM 1

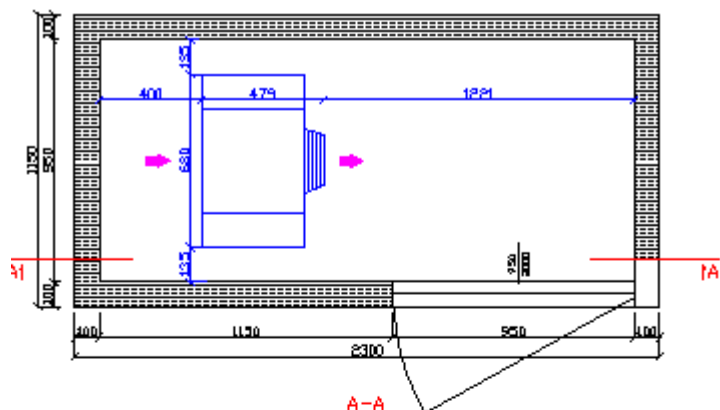

Dimensions	[mm]	KM 1	KM 2	KM 3
L.	External	2300	2300	3450
D.	External	1150	2300	2875
H.	External	2300	2300	2300
Number of charge:		1200 [kg]	2500 [kg]	4000 [kg]
Temp. of chage:		- 8 [°C]		
Final temperature of the goods:		-18 [°C]		
Freezing time:		24 [h]		
Refrigerator:		R-404a		
Doors:		1pc.		
Goods rotation:		30 [%]		
Type of goods:		mięso, mrożonki		

VERSION:

- complete with refrigeration and control system (unit located on the roof of the chamber)
- housing isothermal chamber (double-sided panels covered with a sheet FeZn coated, standard floor covered from the inside with aluminum sheet łożkową) is based on a system of modular panels with a core of rigid polyurethane foam with a density of approx. 42 kg / m, injected between the metal cladding. The thickness of the polyurethane cartridge is 100 mm-heat transfer coefficient of 0.22 W/m2K
- housing type locks Cam Lock, allowing for simple and quick installation, while ensuring the accuracy and tightness of the connections between the panels.
- housing has a hinged door fitted with a single-key lock with the ability to unlock from the inside. Standard size of door in the light of 950 x 2000 mm. Heated door gasket.

PURPOSE:

Freezing products temperature of about -18 ° C (about 24 h), at the input of approximately -8 ° C.

- Offered outside the standard features and additional elements:
- PVC-profiles to the inner edges and corners to prevent dirt accumulation and facilitate cleaning the interior of the chamber,
 - curtain strips of foil to reduce the loss of coolness when you open the door,
 - wall and ceiling panels may have a lining of sheet steel.